


IVG-G5S

5.0M Black Light illumination H.265 AI IP Camera Module


Features:

- Supporting human detection, face detection, and support to customize other intelligent functions
- 5.0MP HD Black light illumination resolution,clear and fine images;
- Support 2D/3D noise reduction,digital wide dynamic;
- Advanced H.265+ (Compatible with H.265/H.264) video compression,Super low rate,high definition quality of image;
- Professional anti-lightning,conform to GB/T17626.5 and IEC61000-4-5.
- Support ONVIF;access third party;
- Support various mobile monitoring(iPhone,Android);
- Provide web、CMS、center platform management software MYEYE,provide SDK development
- Support cloud technology,easy to achieve network penetration, fro in-line and alarm information pushed

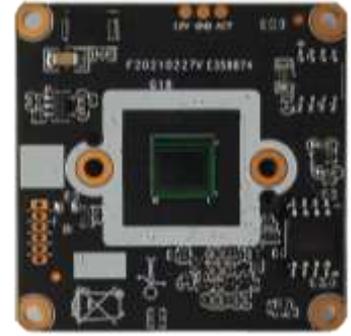

Parameters:

Model	IVG-G5S	
System structure	Embedded RTOS,dual-core 32bit DSP(GK7205V300),pure hard compression ,watch dog	
Sensor	5.0M 1/2.8"IMX335 Black Light illumination CMOS sensor,color 0.0001Lux@F1.2,black/white 0.0001Lux@F1.2	
Video compression	H.265 +(Compatible with H.265/H.264) support dual stream,AVI;0.1M~8Mbps variable;1~30f/s variable	
Image output	Main stream: 2592*1944 @25fps,2560*1440@25fps,2304*1296@25fps,1920*1080@25fps; sub-stream: 800*448@25fps	
Shutter	1/50(1/60)s to 1/10,000s	
Lens	N/A	
Day and night	Support IR-CUT,IR-CUT coil has an internal resistance of 20 ohms, the power-on time is less than 200ma, and the voltage is 3.5V-6V	
Noise reduction	Support 2D/3D	
Wide dynamic	Support digital Wide dynamic	
Auto iris	N/A	
Audio compression	G.711,support bidirectional talk,audio&video synchronization	
Audio interface	1ch input,level:2Vp-p,impedance:1kΩ,support sound pick-up input;1ch output,impedance:16Ω,30mw,support microphone	
Network interface	1*RJ45 10/100M adaptive Ethernet port; support RTSP/FTP/DHCP/NTP/UPnP etc	
Extension interface	Support external audio power amplifier, white light signal control, UART to expand other functions	
Singal interface	One photo resistance interface,one IR-CUT interface ,support photo resistance signal and IR-CUT links to IR	
PTZ	N/A	
Motor interface	N/A	
Alarm I/O	N/A	
WIFI interface	N/A	
Reset interface	N/A	
SD Card	N/A	
Reliability	Comprehensive lightning protection, 7 * 24 hours 65 °C high temperature stable and reliable testing	
Intelligence analysis	Supporting human detection, face detection, and support to customize other intelligent functions	
Other function	Support WEB,OSD,live video transmission,motion detect and IO alarm,front-end storage/playback/download, and center reminder and image linkage,support JPEG capture: united remote client monitoring sofaware、MYEYE;perfect SDK;	
ONVIF	Support	
Mobile monitoring	Support multiple mobile monitoring (iOS, Android)	
Power	DC12V/2A input, power consumption:≤3W,	
Dimension	38mm*38mm	
Other	Support POE power supply, not support any custom,The drive voltage of the light board is at 3.3V	

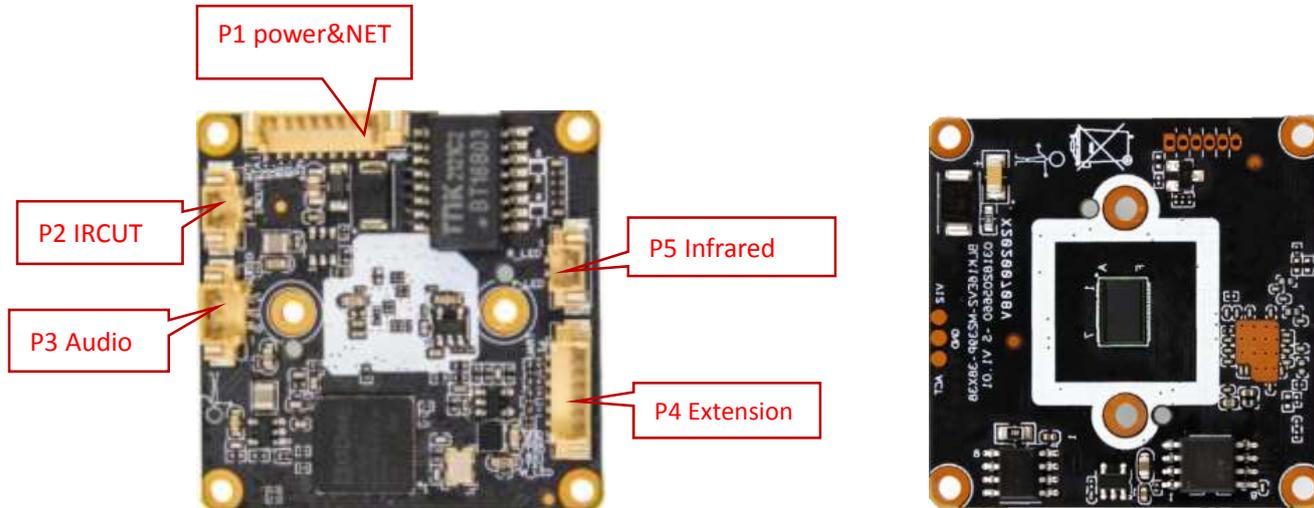

sign	Socket	Specific No	Interface Description	Function
P1	J1	1	ACT_LED	Indicator light
		2	STA_LED	Indicator light
		3	ETHTX+	ETHTX+
		4	ETHTX-	ETHTX-
		5	ETHRX+	ETHRX+
		6	ETHRX-	ETHRX-
		7	GND	GND
		8	+12V	12V input
P2	J4	1	IR-CUT	IR-CUT
		2	IR-CUT	IR-CUT
P3	J40	1	GND	GND
		2	AC_IN	Audio input
		3	AC_OUT	Audio output
P4	J44	1	GND	GND
		2	UART0_RXD	Debug Serial port accept
		3	UART0_TXD	DebugSerial port send
		4	UART1_RXD	Serial port accept
		5	UART1_TXD	Audio IO port
		6	W_LED	White light control
P5	J41	1	R_LED	Soft infrared signal control interface
		2	Y_LED	Hard photosensitive infrared interface