


DVDD_IO can be either 1.5V or 3.3V Resume well power, regardless iHDMI is implemented or not. However, external codec/MDC must have the same voltage level as PCH VCCSUSDA power.

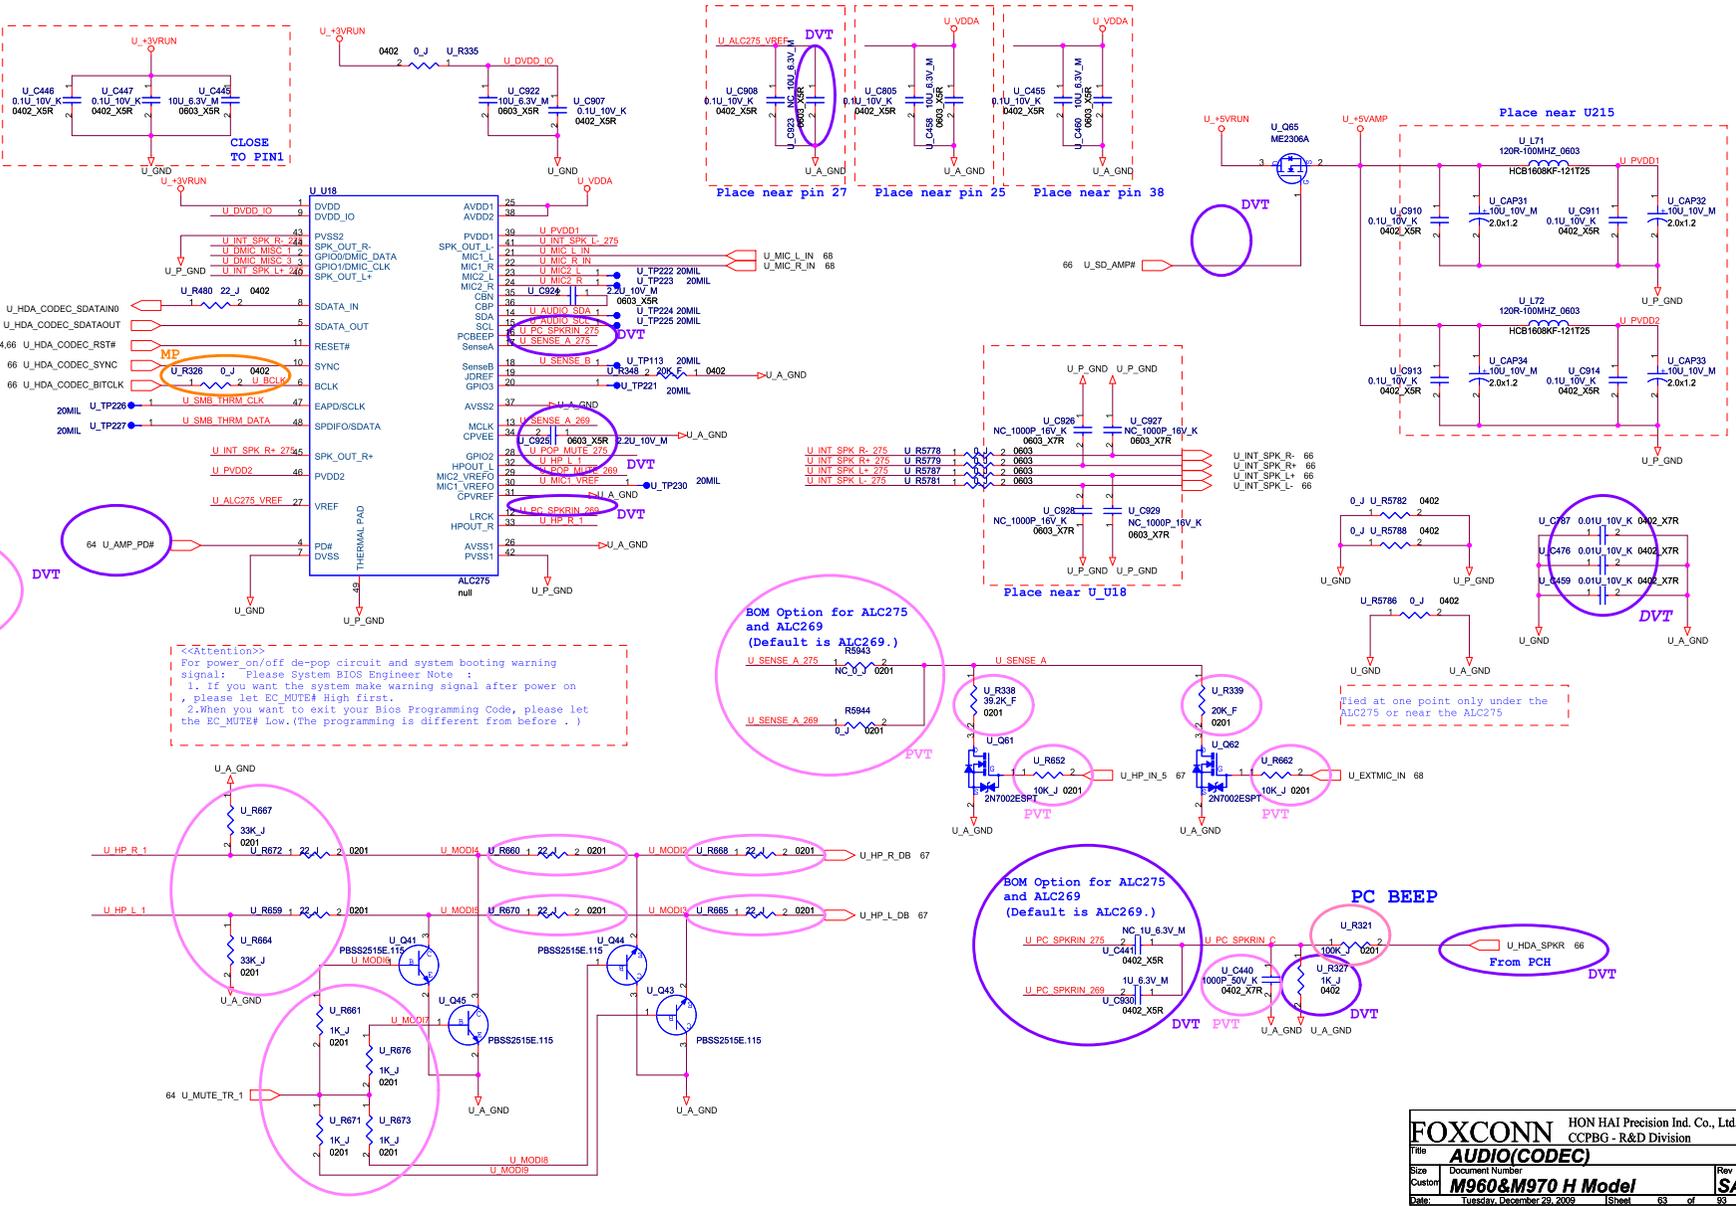

BOM Option for ALC275 and ALC269 (Default is ALC269.)

BOM Option for ALC275 and ALC269 (Default is ALC269.)

BOM Option for ALC275 and ALC269 (Default is ALC269.)

<<Attention>>
For power on/off de-pop circuit and system booting warning signal: Please System BIOS Engineer Note :
1. If you want the system make warning signal after power on , please let EC_MUTE# High first.
2. When you want to exit your Bios Programming Code, please let the EC_MUTE# Low. (The programming is different from before .)